

FIG. 1

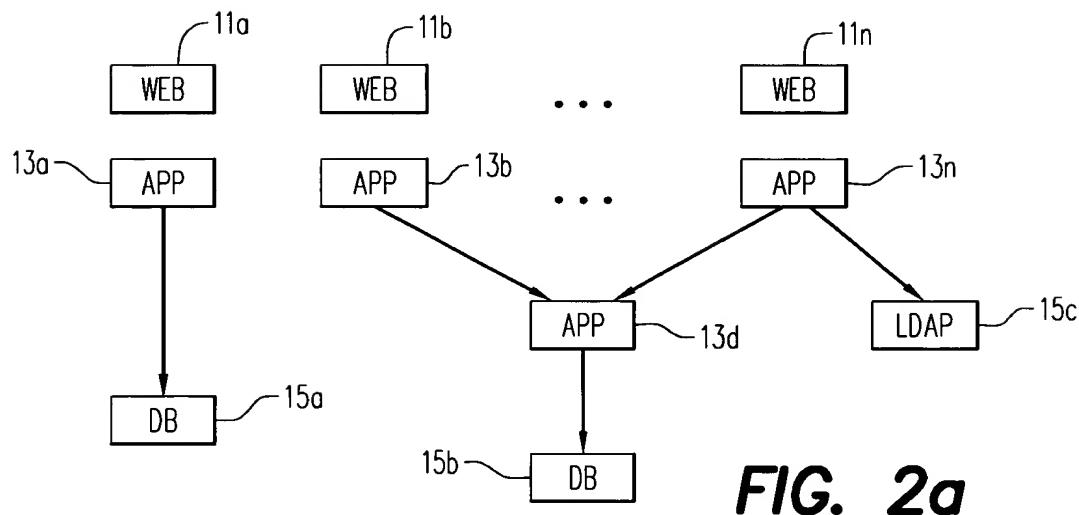


FIG. 2a

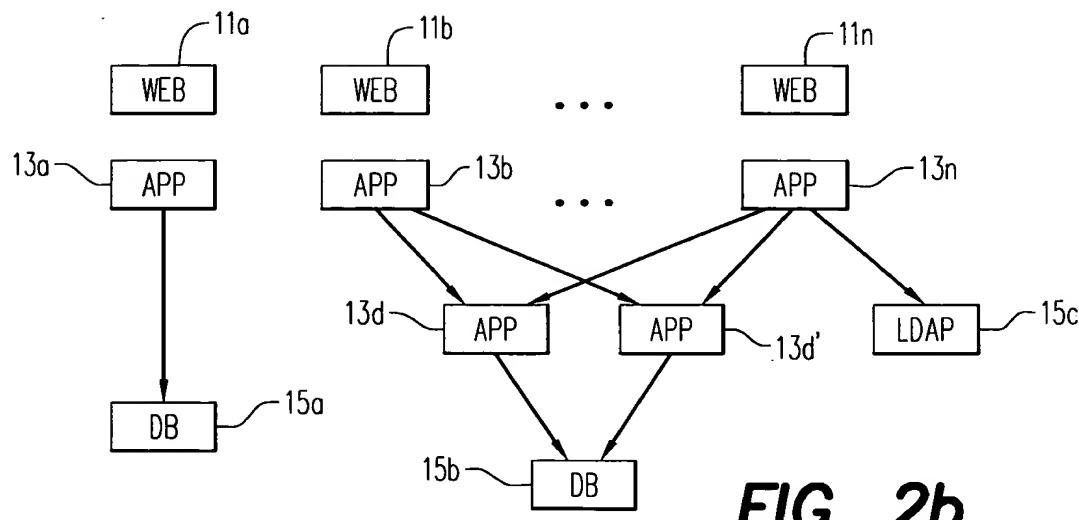


FIG. 2b

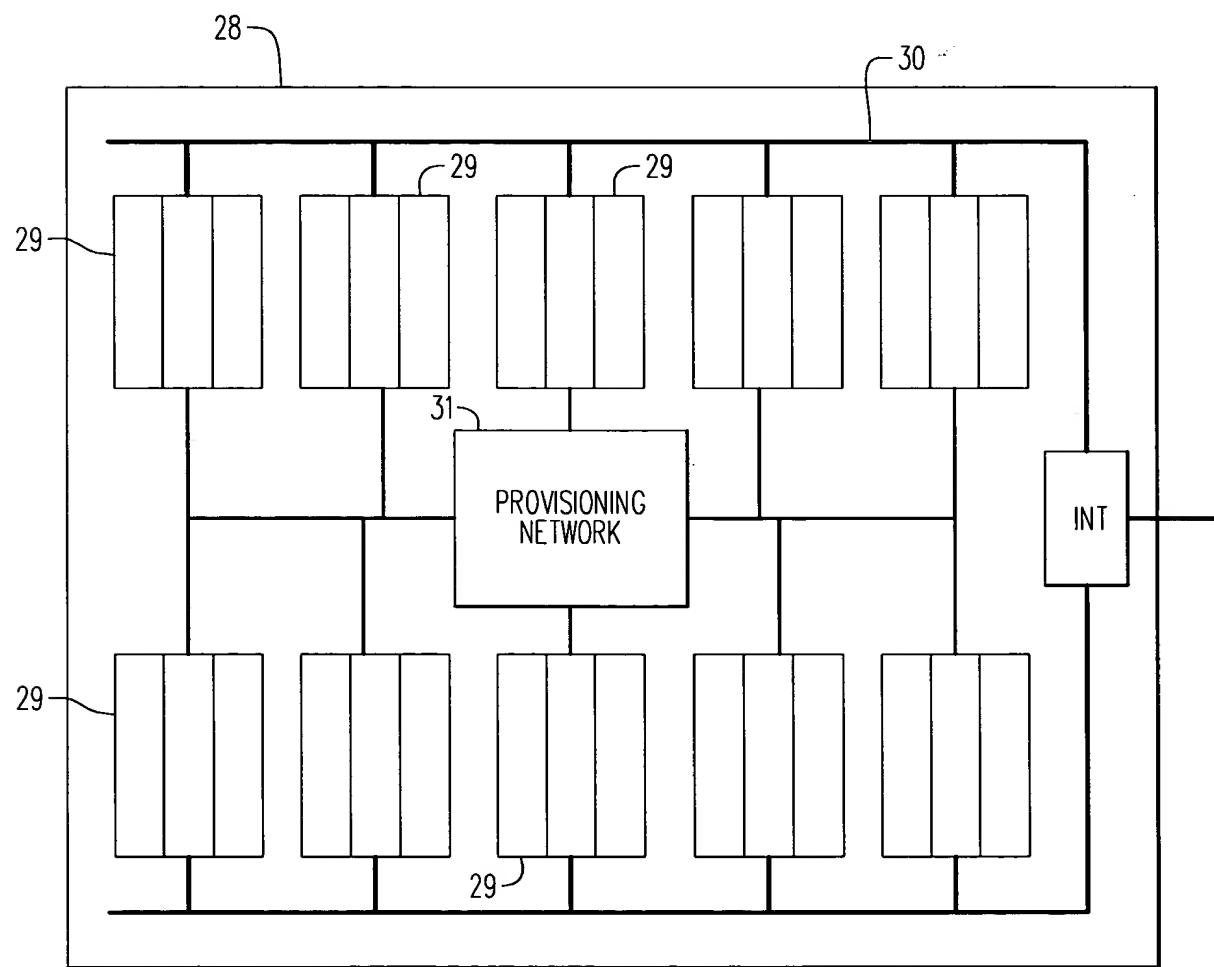
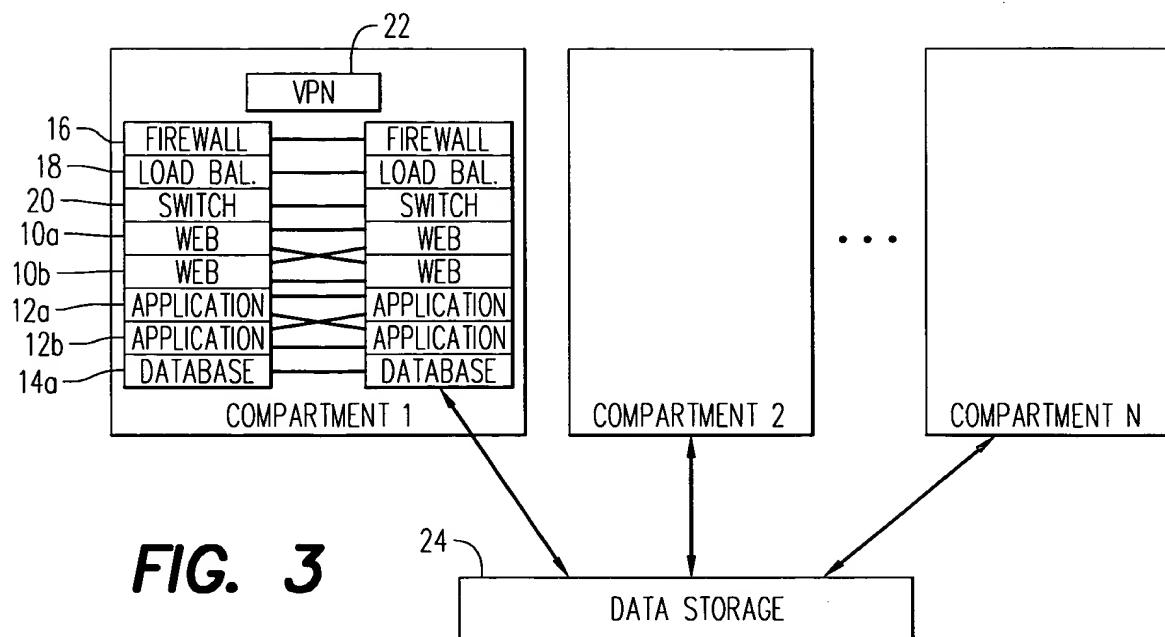


FIG. 4

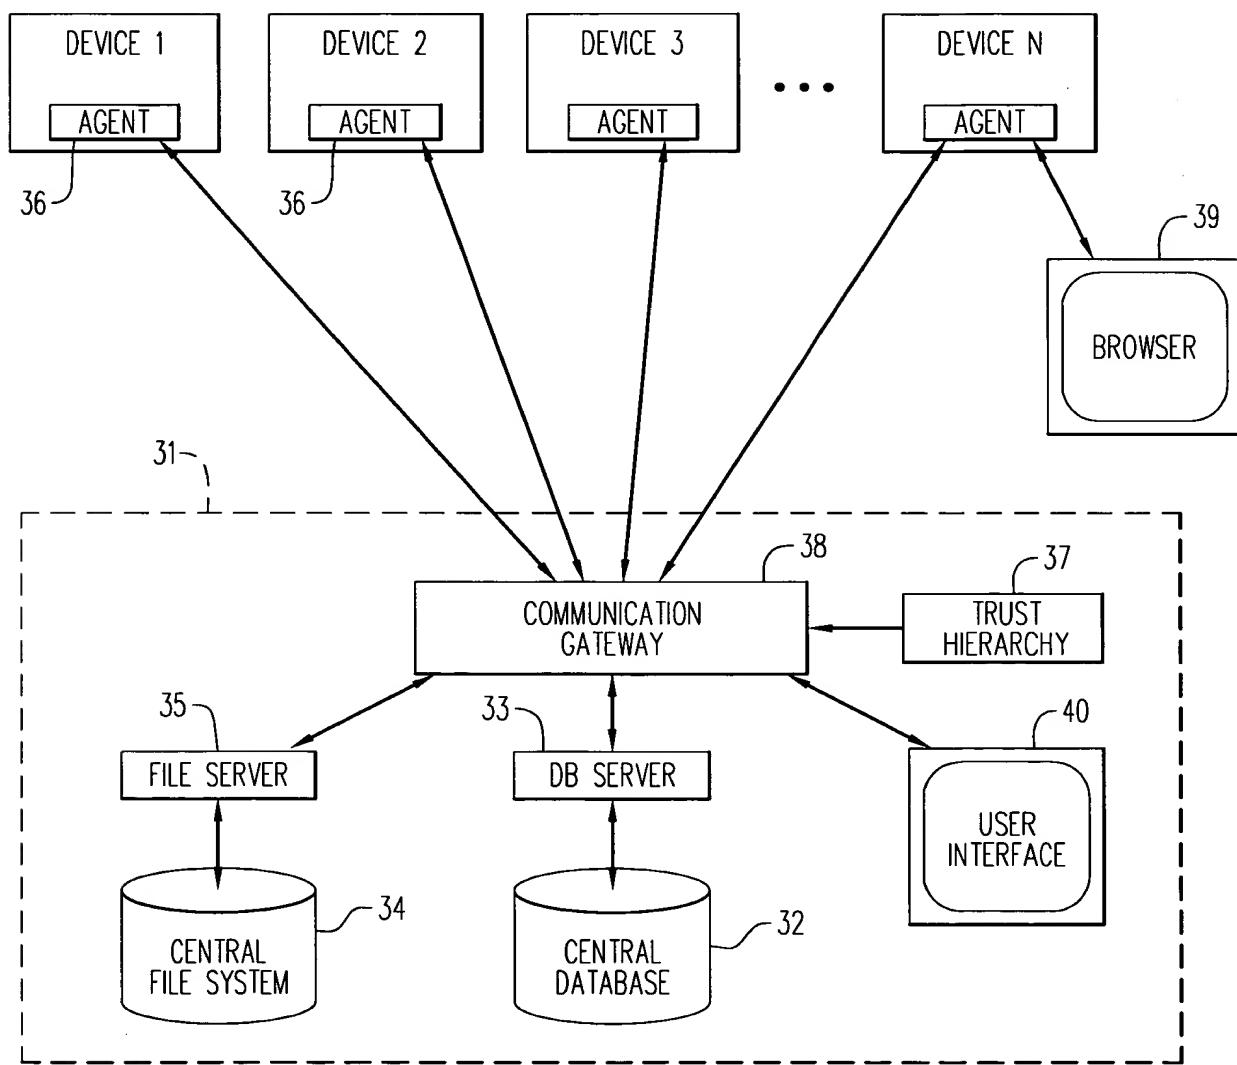


FIG. 5

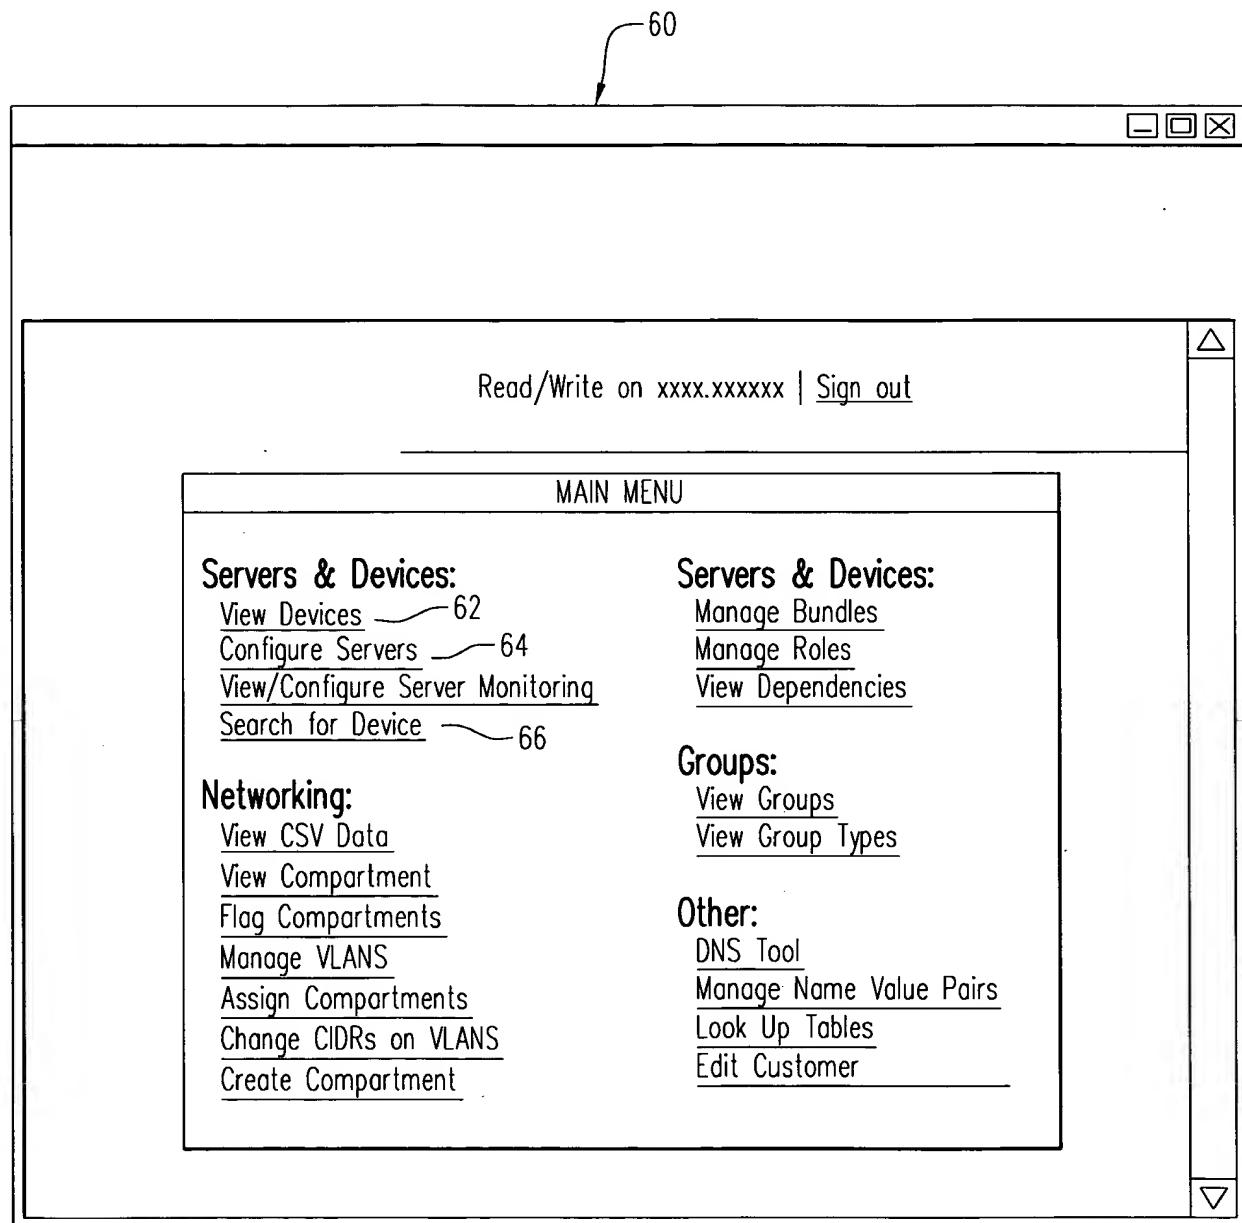


FIG. 6

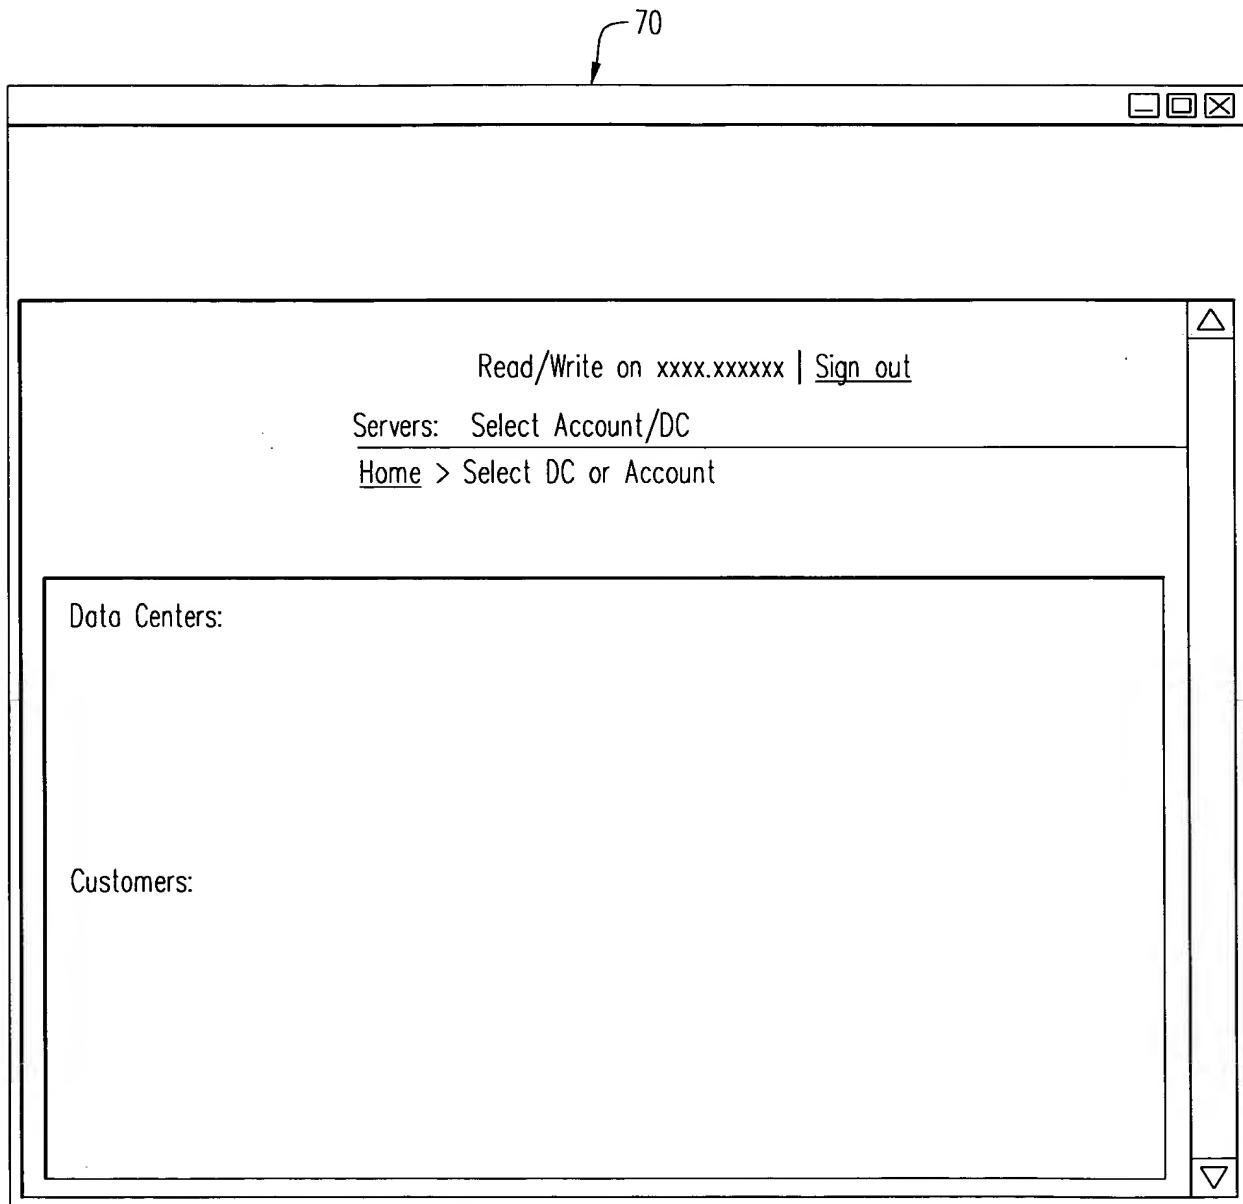


FIG. 7A

72

The screenshot shows a window titled 'Servers: Server List'. At the top, there is a status bar with 'Read/Write on xxxx.xxxxxx | [Sign out](#)'. Below the status bar, the title 'Servers: Server List' is displayed. Underneath the title, a navigation path is shown: 'Home > Select DC or Account > View Servers'. The main content is a table titled 'Server List for Customer'. The table has the following columns: DC, Service, Use/State, OS Role, App Role, Cust Role, Eff Beg Dt, IP Address/hostname, and MID. There are three rows of data in the table:

DC	Service	Use/State	OS Role	App Role	Cust Role	Eff Beg Dt	IP Address/hostname	MID
	OTHER	EMBRYO OK	Linux (Default)	Log Server		2/15/2001		
	WEB	STAGING OK	SunOS 5.7 (Default)	iPlanet 4.1 w/ JDK 1.2.1_05a	Customer Codes and Accounts	2/15/2001		
	WEB	STAGING OK	SunOS 5.7 (Default)	iPlanet Web 4.1 jdk 1.2.2_05a oracle 8.1.6	Customer Codes and Accounts	2/15/2001		

At the bottom of the table, there are navigation arrows: a left arrow on the left and a right arrow on the right. The entire window has standard window controls (minimize, maximize, close) at the top right.

FIG. 7B

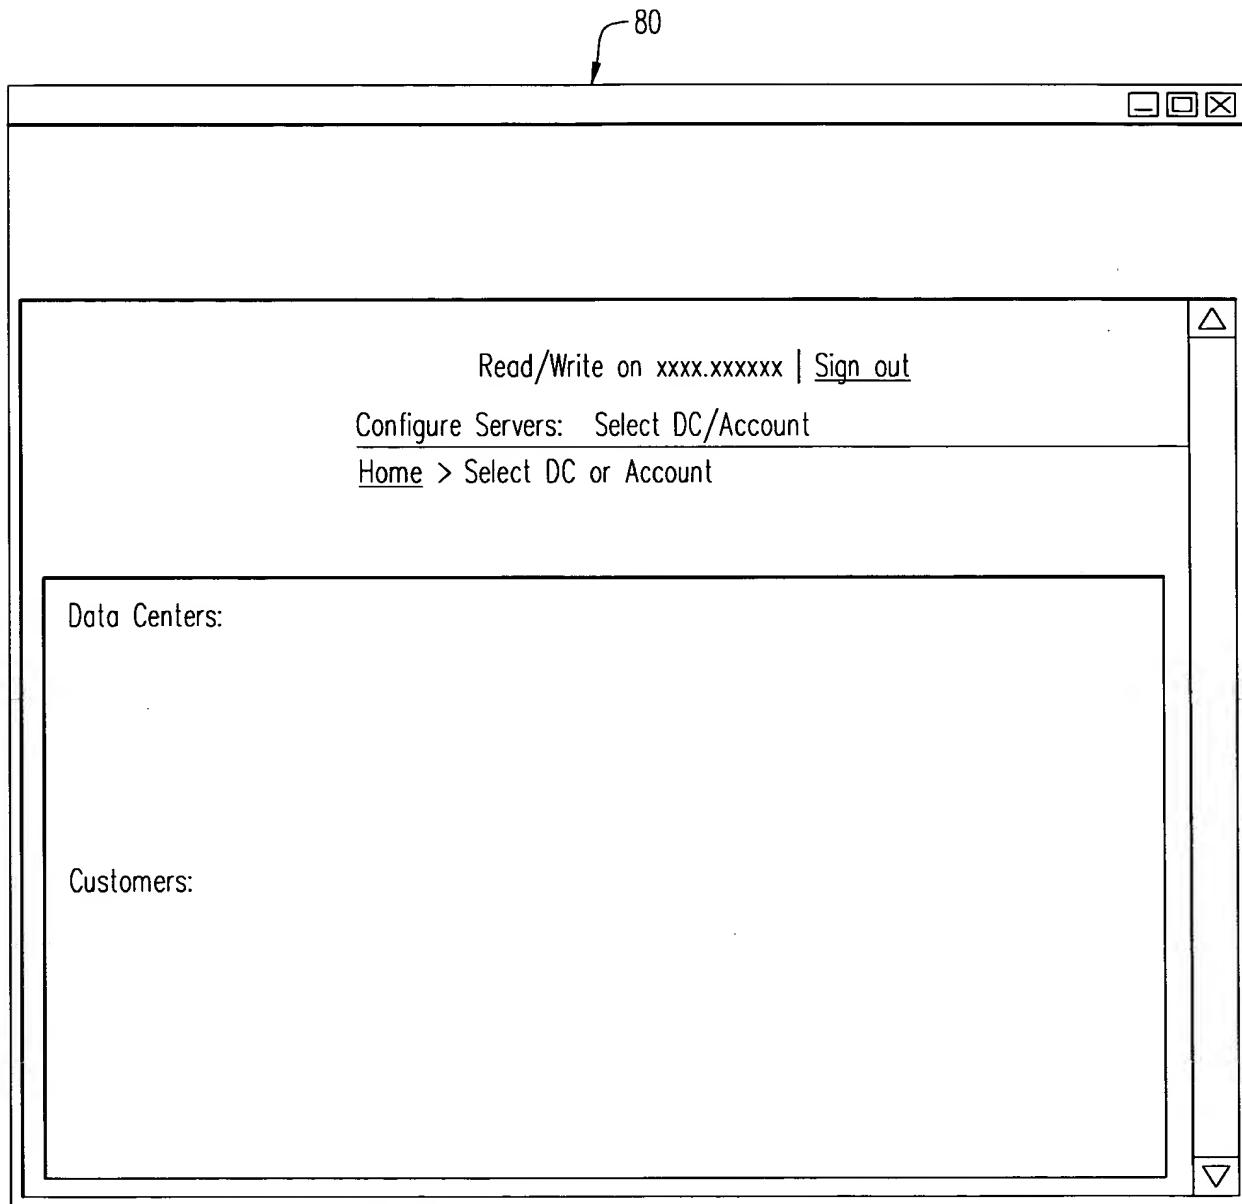


FIG. 8A

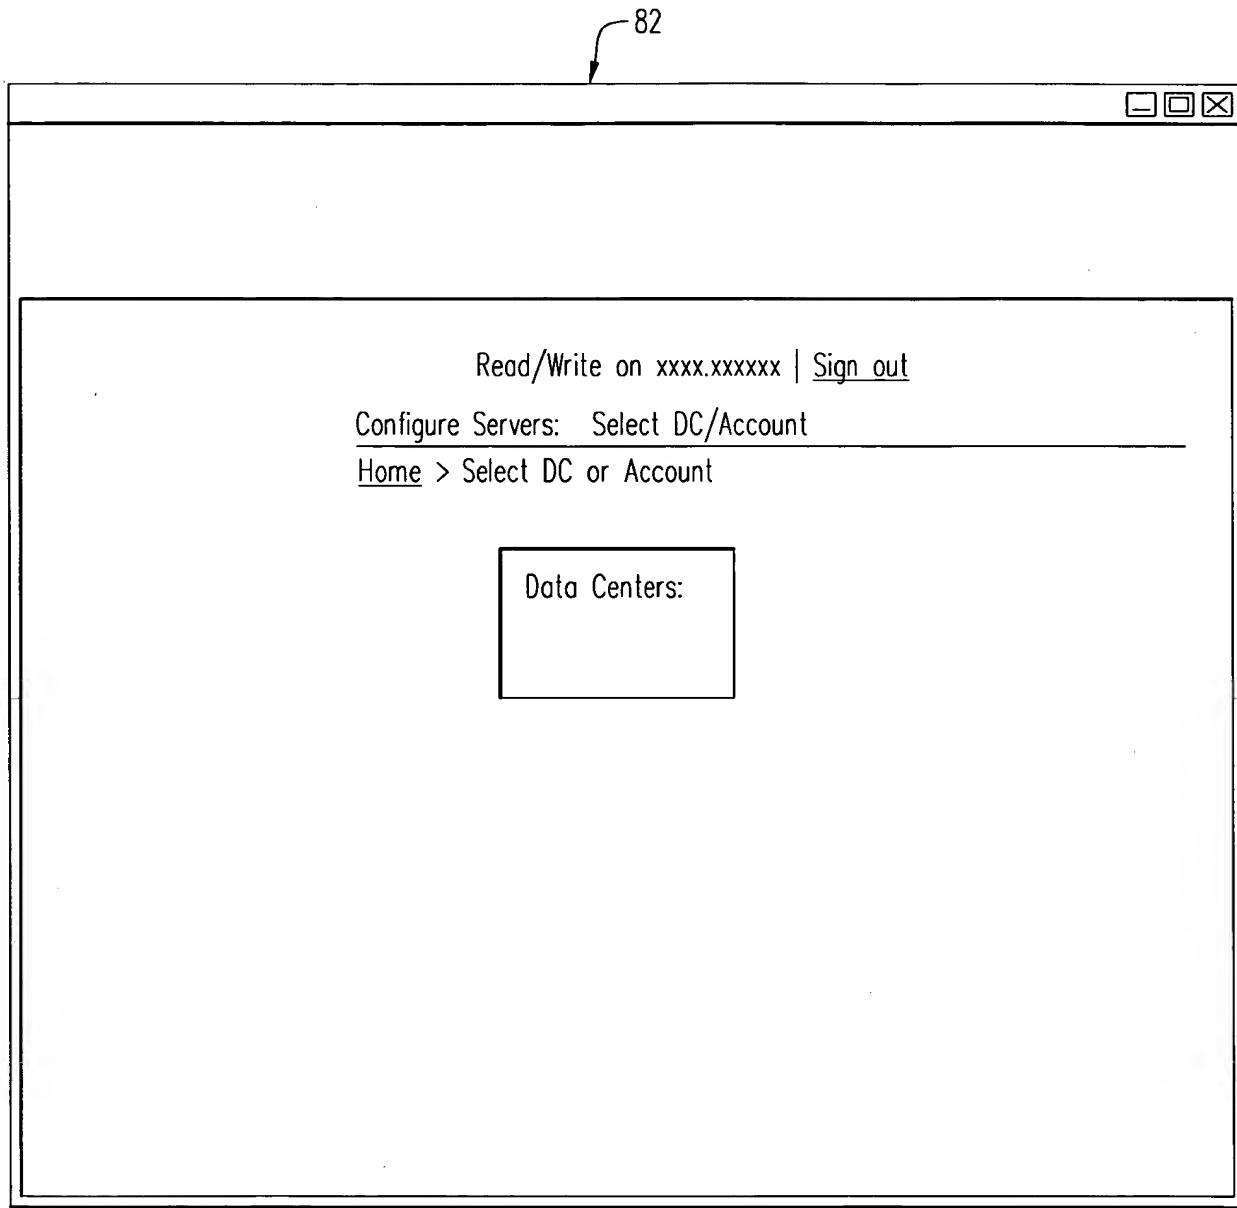


FIG. 8B

84

Read/Write on xxxx.xxxxxx | [Sign out](#)

Configure Servers: Server Lists

[Home](#) > [Select DC or Account](#) > Server List for Customer

Configure Servers List of Servers for Customer Datacenter									
Sel	Service	OS Role	App Role	Cust Role	Use/State	IP/Hostname	Notes	Action	State
<input type="checkbox"/>	OTHER 86	Linux (Default)	Log Server	Unspecified	EMBRYO OK		null	[View] [OS] [App/Cust] [Keys] [Groups]	
<input type="checkbox"/>	WEB	SunOS 5.7 (Default)	iPlanet 4.1 w/ JDK 1.2.2_05a	Customer Codes and Accounts	STAGING OK		null	[View] [OS] [App/Cust] [Keys] [Groups]	
<input type="checkbox"/>	WEB	SunOS 5.7 (Default)	iPlanet Web 4.1 jdk 1.2.2_05a oracle 8.1.6	Customer Codes and Accounts	STAGING OK		null	[View] [OS] [App/Cust] [Keys] [Groups]	
<input type="checkbox"/>	Unspecified	not assigned yet	Unspecified	Unspecified	EMBRYO DECOMMISSIONED		null	[View]	
<input type="checkbox"/>	DATABASE	SunOS 5.7 (Default)	Oracle 8.1.6 (Staging w/ DBA accounts/sudoers)	Customer Codes and Accounts w/o	EMBRYO OK		null	[View] [OS] [App/Cust] [Keys] [Groups]	

FIG. 8C

84

		(Default)		Accounts					
<input type="checkbox"/>	General Support	SunOS 5.7 (Default)	siteminder 4.0	Customer Codes and Accounts	PRODUCTION OK		null	[View] [OS] [App/Cust] [Keys] [Groups]	
<input type="checkbox"/>	APPLICATION	SunOS 5.7 (Default)	Directory 4.12	Customer Codes and Accounts	EMBRYO OK		null	[View] [OS] [App/Cust] [Keys] [Groups]	
<input type="checkbox"/>	APPLICATION	SunOS 5.7 (Default)	Directory 4.12	Customer Codes and Accounts	EMBRYO OK		null	[View] [OS] [App/Cust] [Keys] [Groups]	
<input type="checkbox"/>	DATABASE	SunOS 5.7EMC/ JNI.SDS	Oracle 8.1.6 (Prod Server)	Customer Codes (no Accounts)	PRODUCTION OK		null	[View] [OS] [App/Cust] [Keys] [Groups]	

Apply Action to Multiple Servers

Action (for selected)	
[Select All] [Unselect All]	[Test Reconcile] [Change OS Role] [Change App/Cust Role]

88 90 92 Done—return to main menu

FIG. 8D

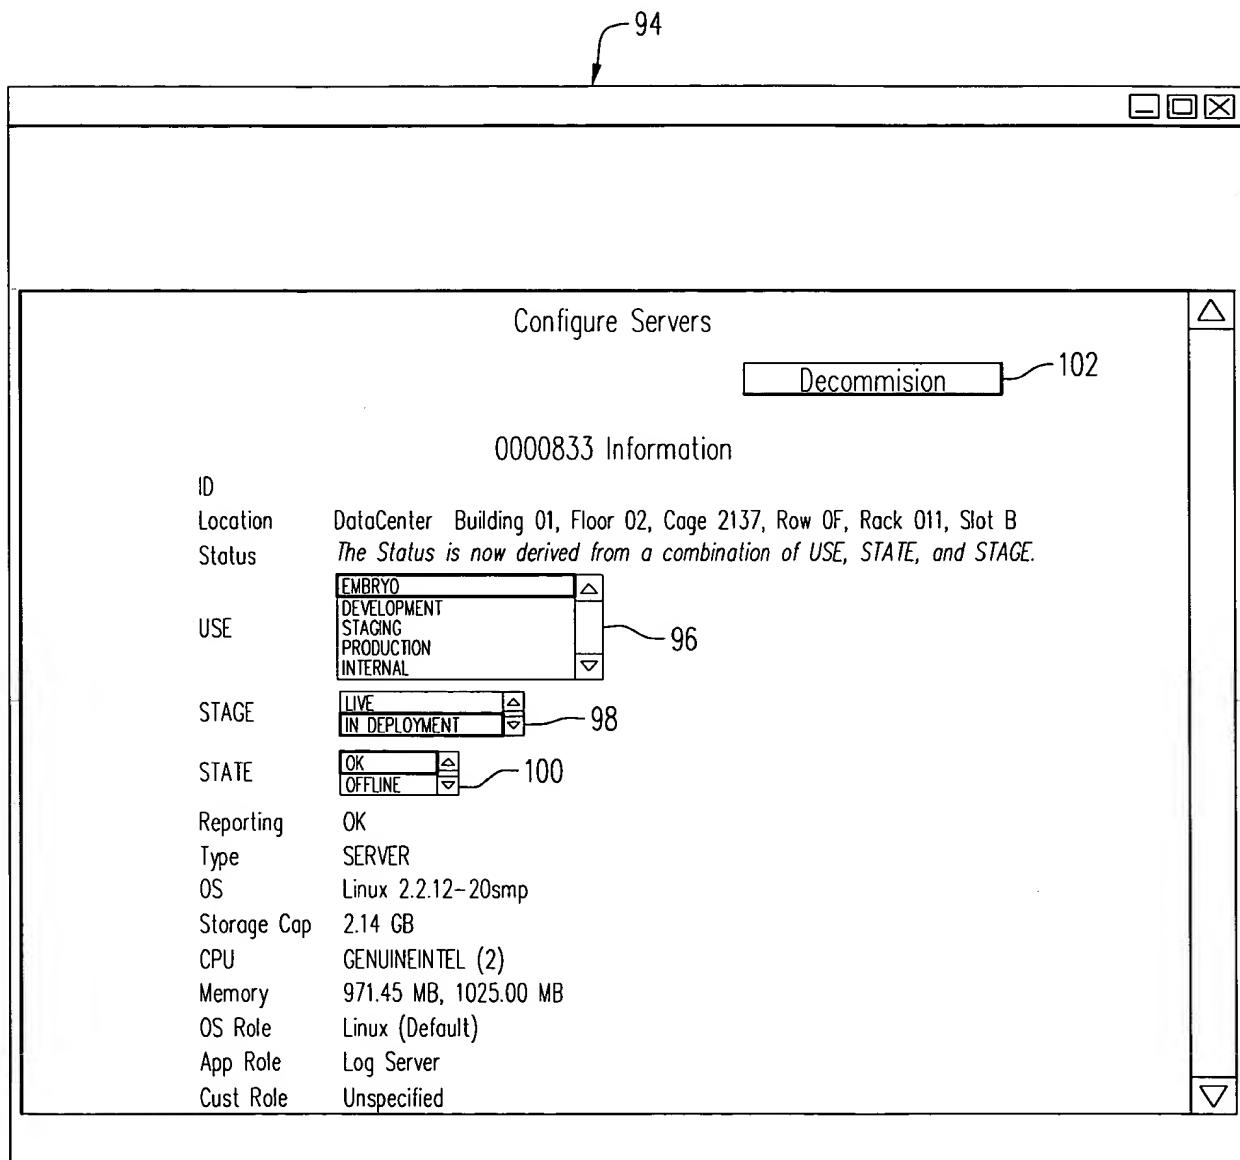


FIG. 8E

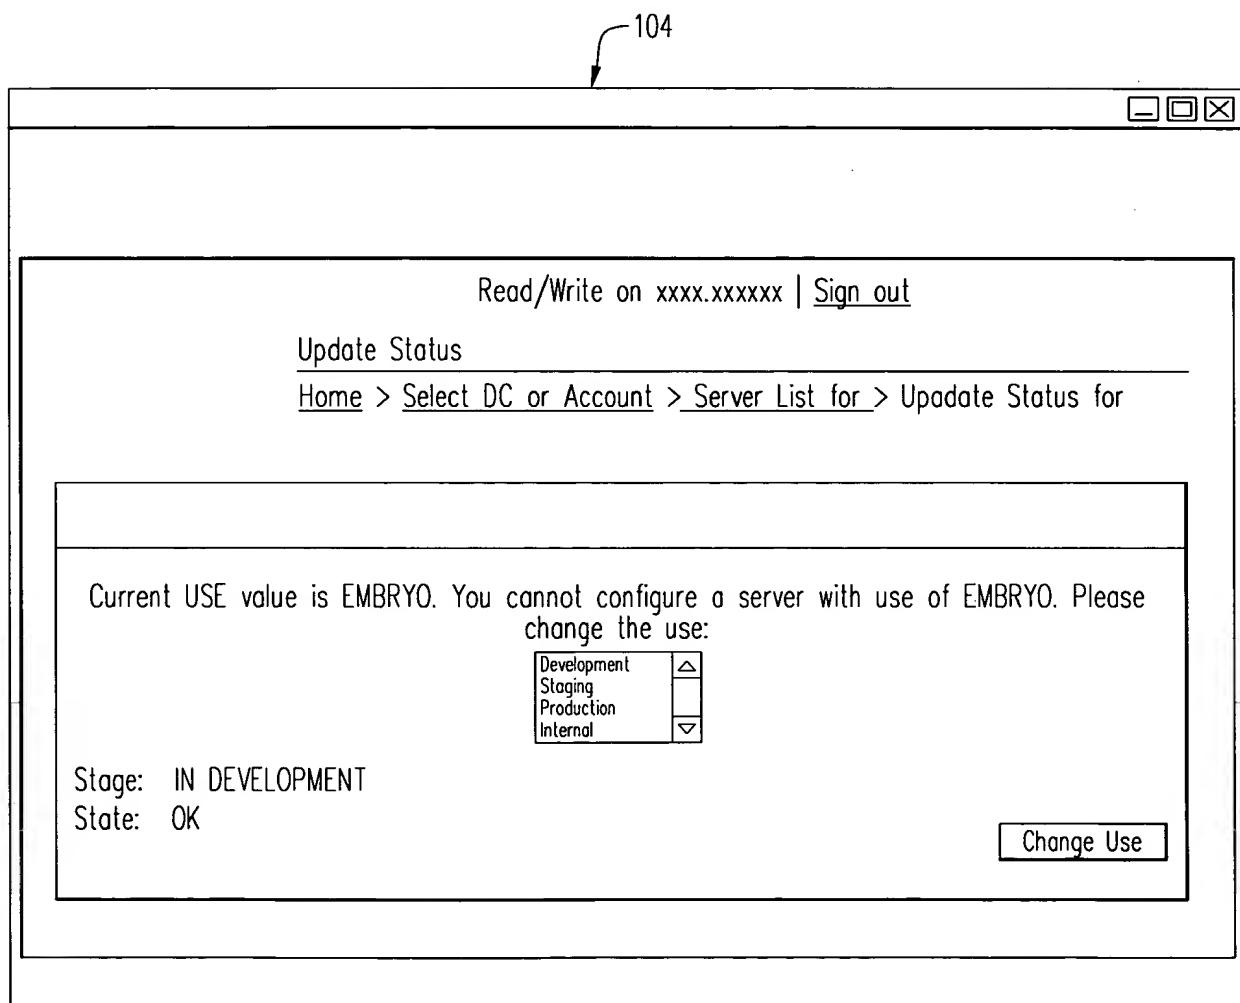


FIG. 8F

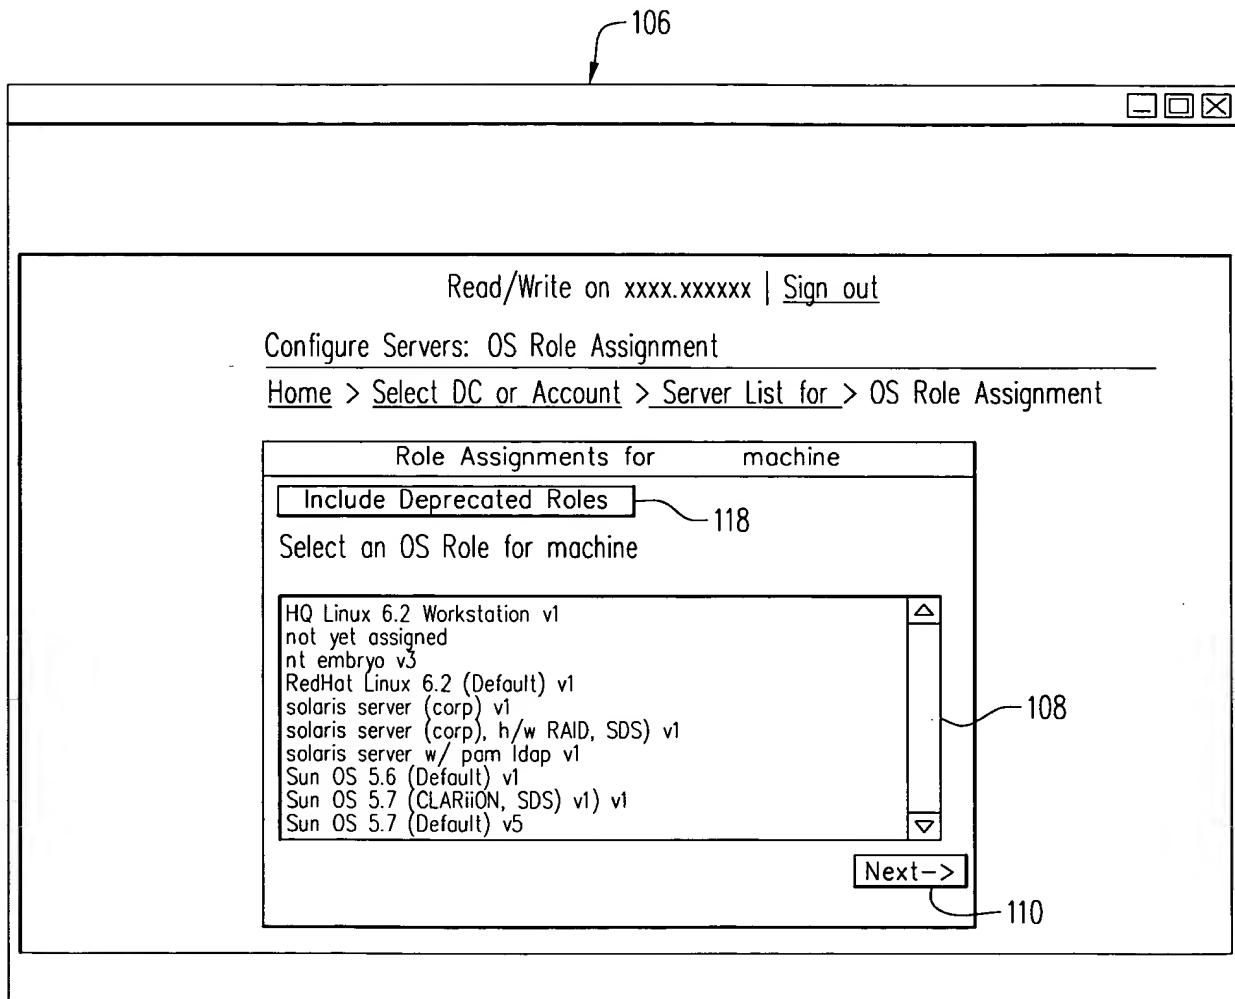


FIG. 8G

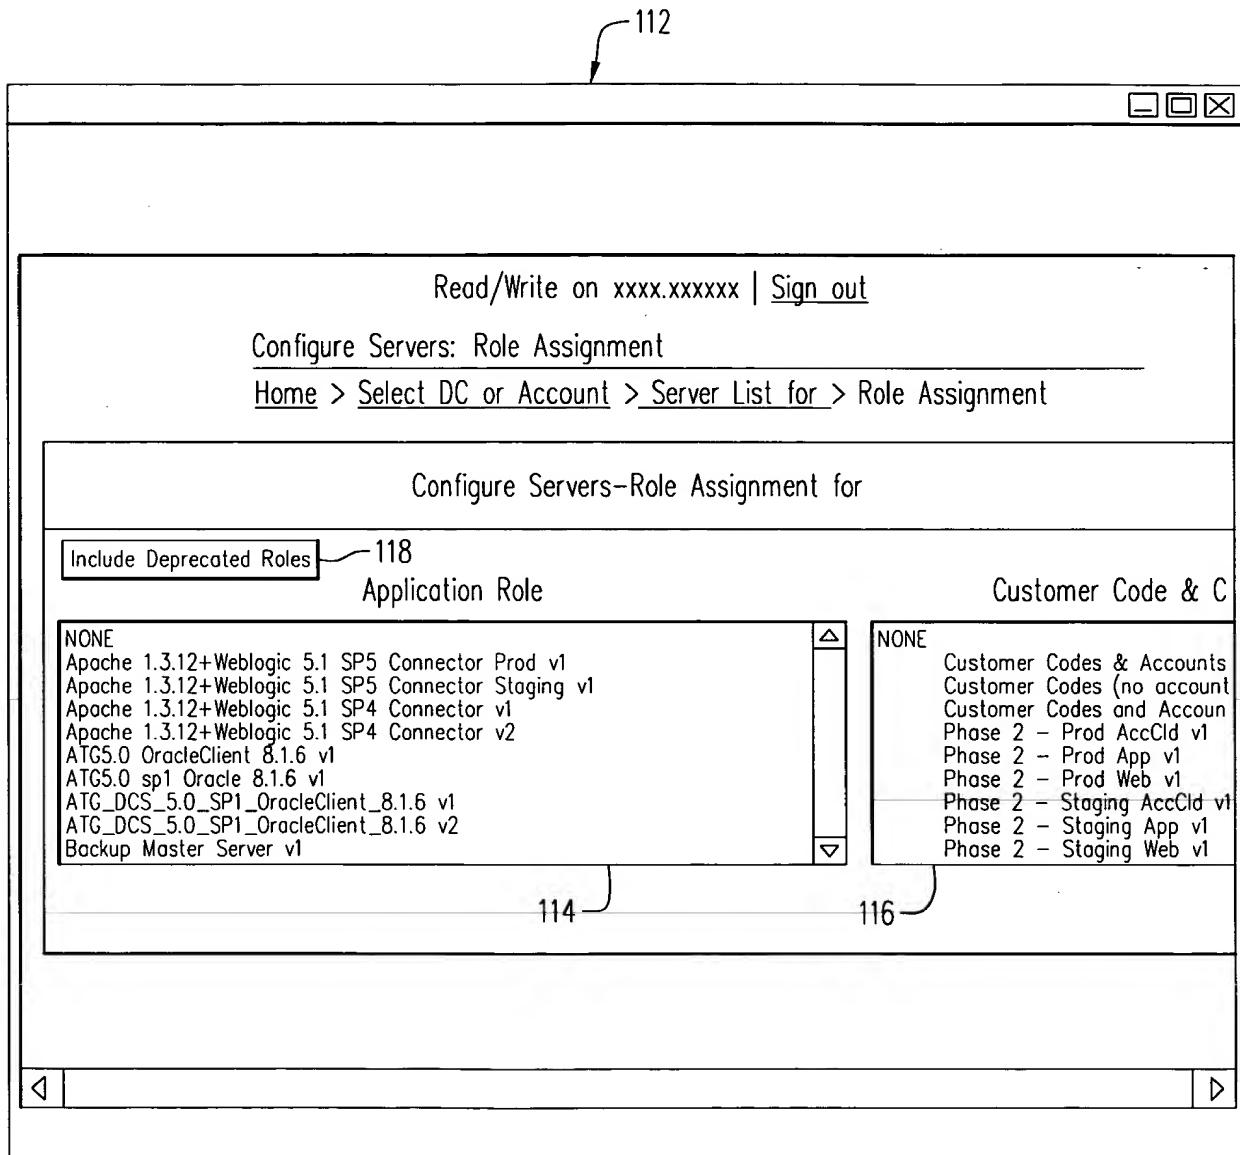


FIG. 8H

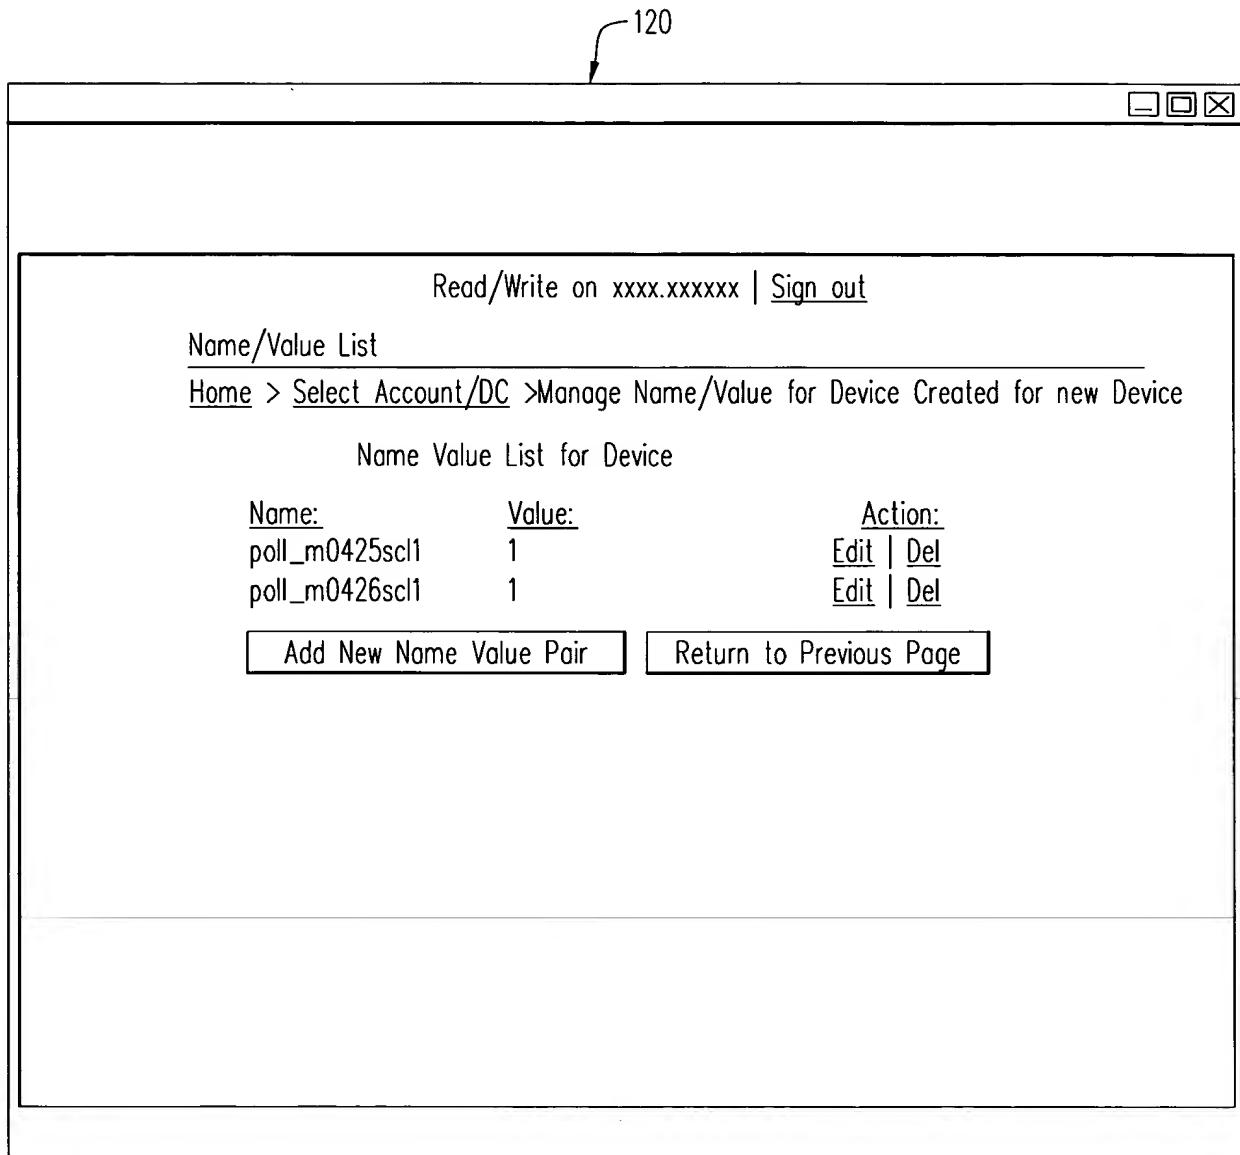


FIG. 8I

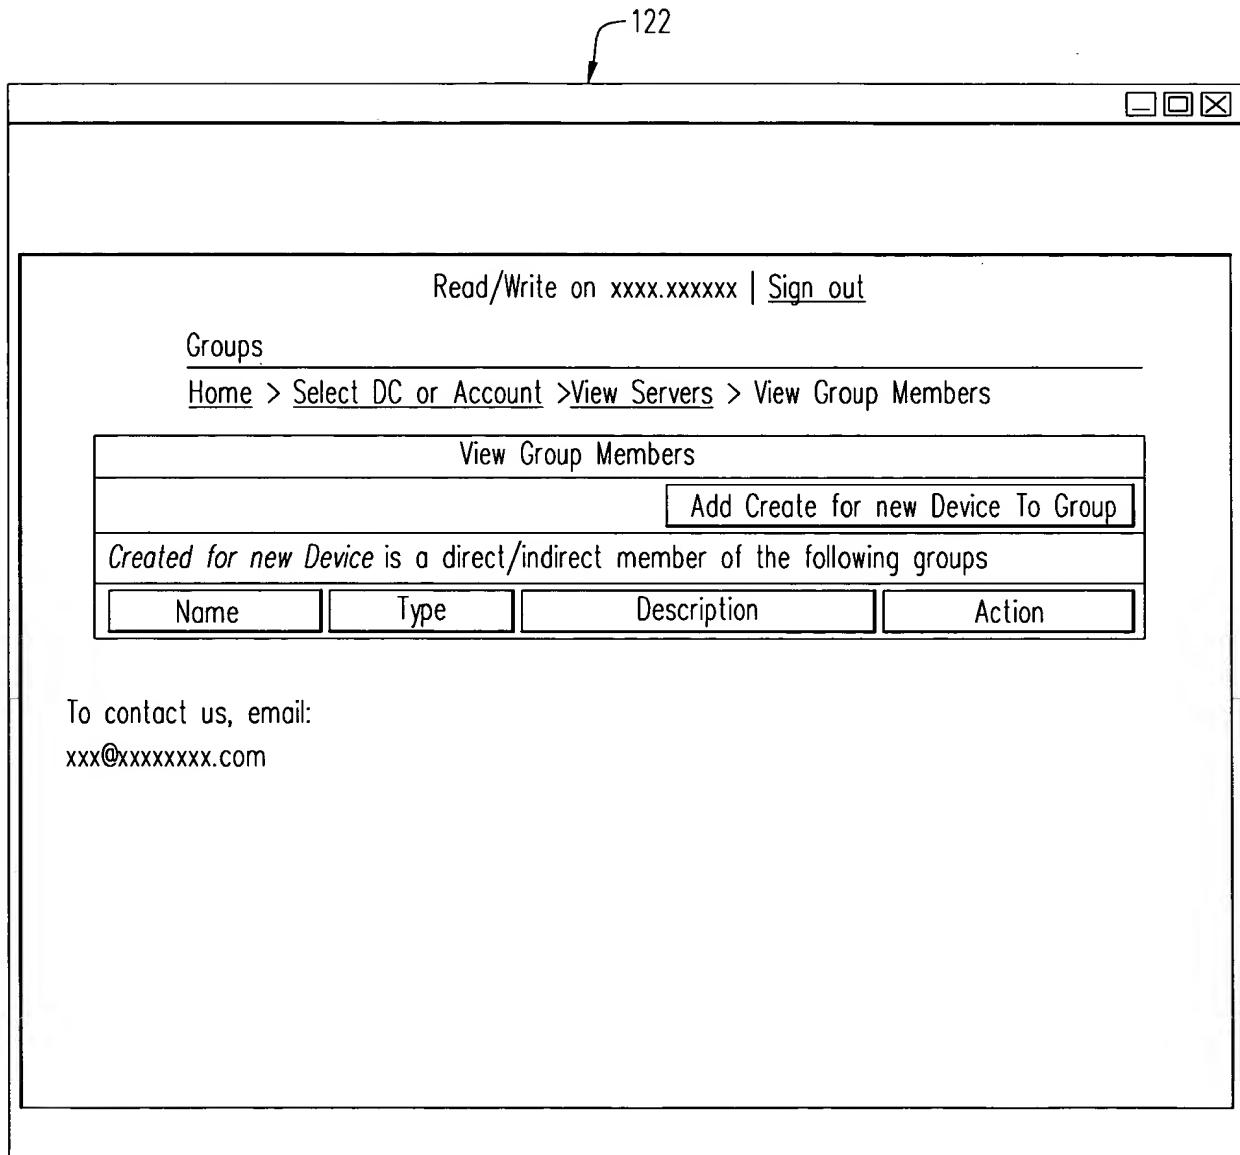


FIG. 8J

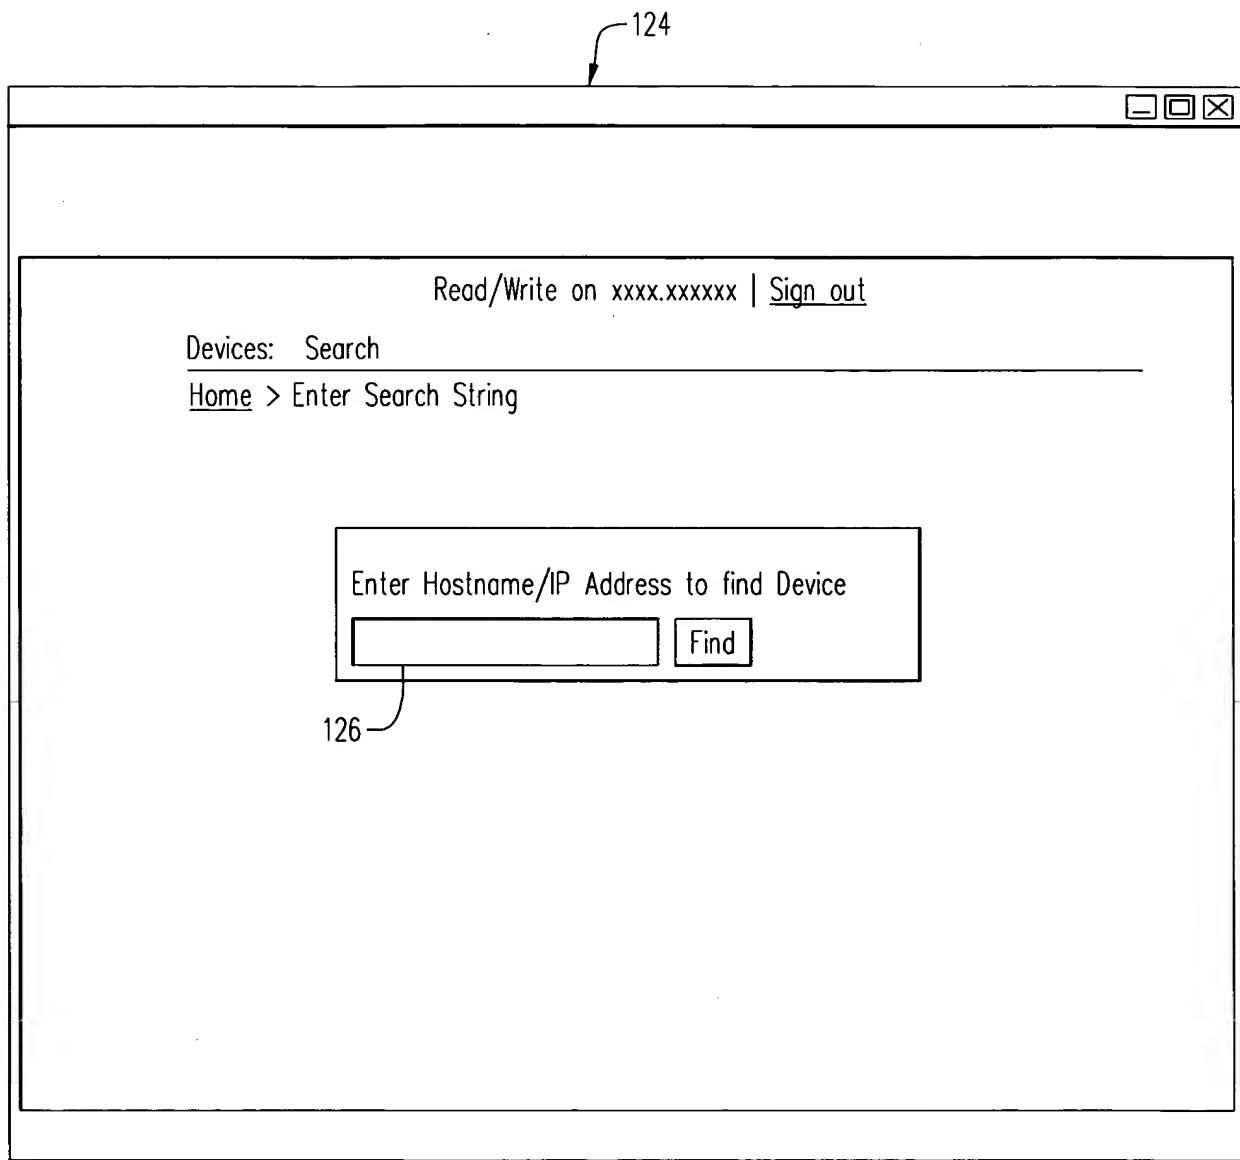


FIG. 9A

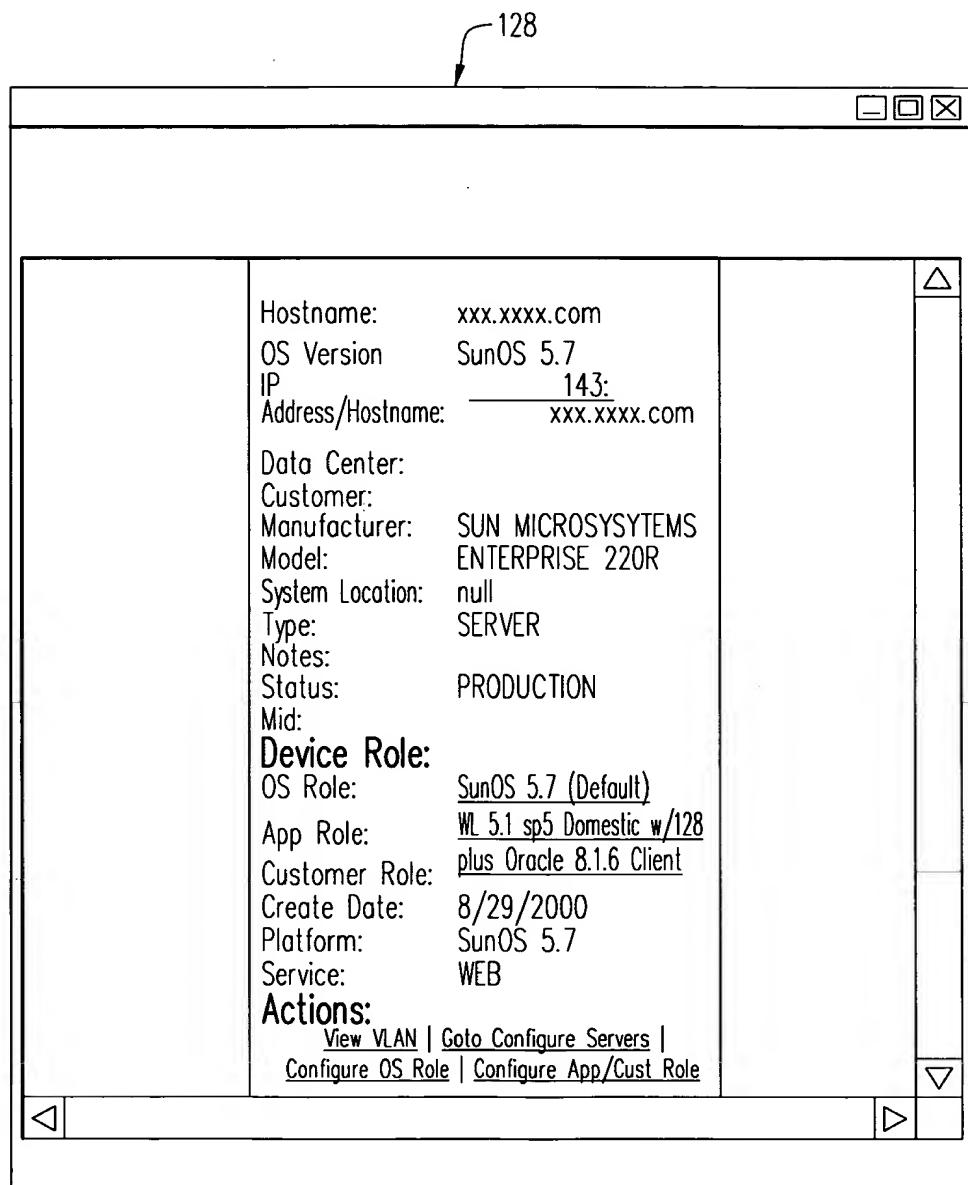


FIG. 9B

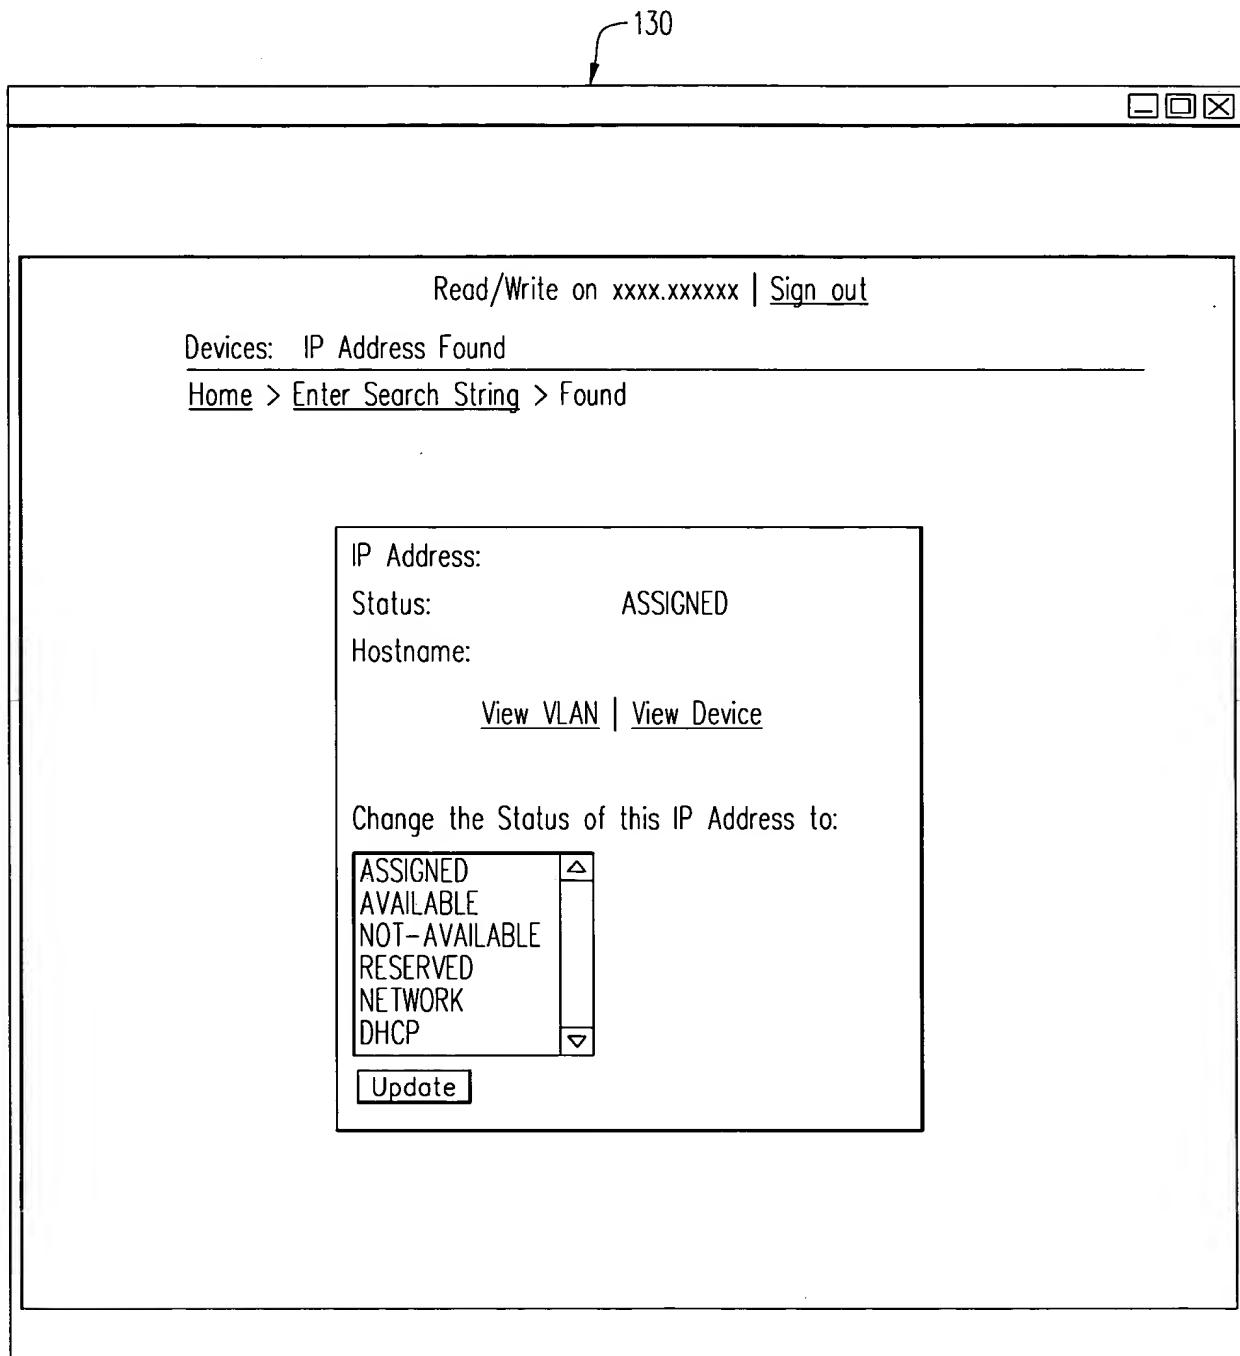


FIG. 9C

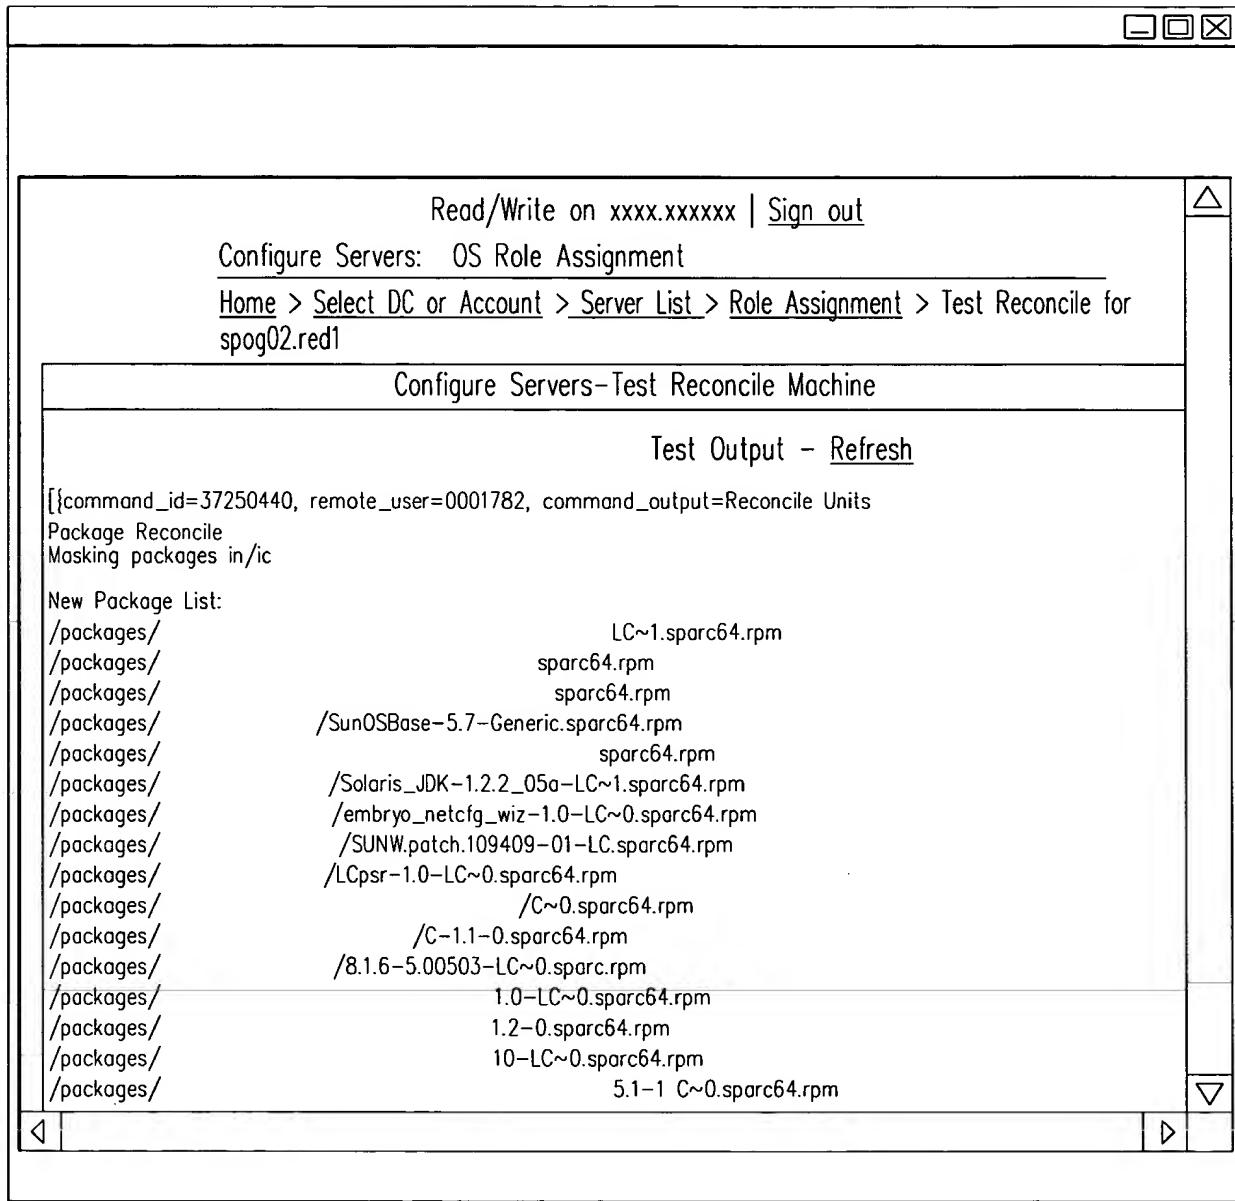


FIG. 10A

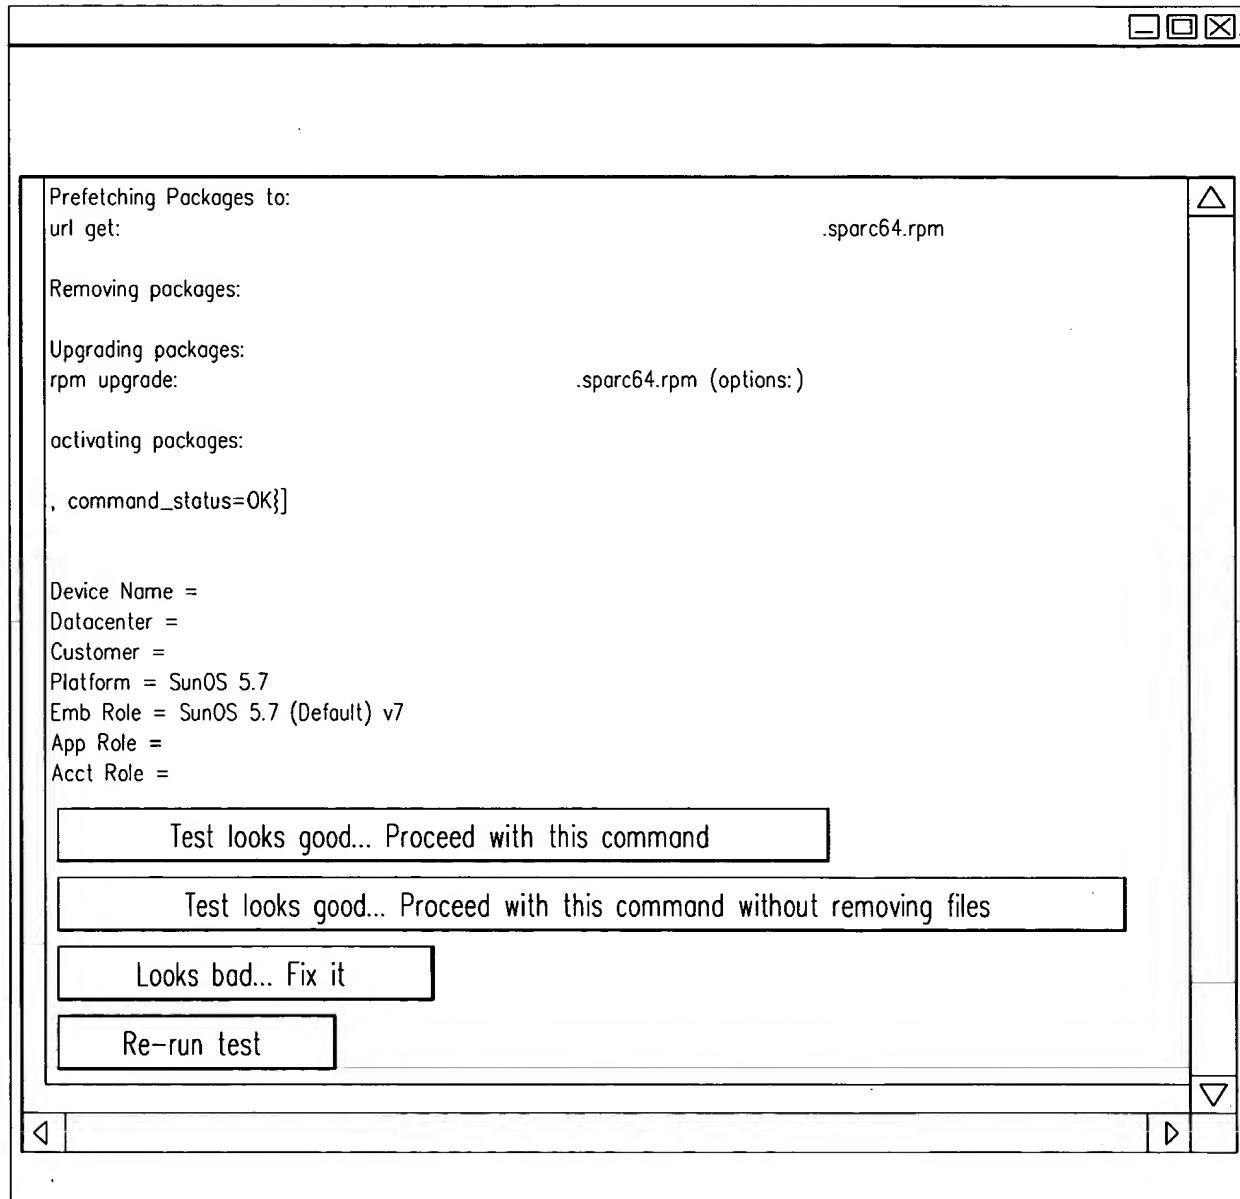


FIG. 10B